



Polarization Beam Combiner/Splitter for Pulse Application (PBC/PBS Series)

Spec. Review No. SR3840 Date: Feb. 27, 2009


The Polarization Beam Combiner/Splitter is a compact high performance lightwave component that combines two orthogonal polarization signals into one output fiber. The most common application is to combine the light of two pump lasers into one single fiber to double the pump power in EDFA or Raman Amplifier. The device can also be used as a beam splitter.

Specifications

Parameter	Unit	Grade P	Grade A
Center Wavelength (λ_c)	nm	1310, 1480 or 1550	
Operating Wavelength Range	nm	$\lambda_c \pm 40$	
Typ. Insertion Loss	dB	0.4	0.5
Max. Insertion Loss	dB	0.6	0.7
Min. Extinction Ratio (for splitter only)	dB	20	18
Min. Return Loss	dB	50	
Directivity	dB	50	
Max. Average Optical Power	mW	1000	
Max. Peak Power for ns pulse	kW	1	
Fiber Type		PM Panda fiber for Port 1 & 2, SMF-28 or PM Panda fiber for Port 3	
Max. Tensile Load	N	5	
Operating Temperature	°C	-5 to +70	
Storage Temperature	°C	-40 to +85	

*IL is 0.3 dB higher, RL is 5 dB lower, and ER is 2 dB lower for each connector added. Connector key is aligned to slow axis.

Package Dimensions

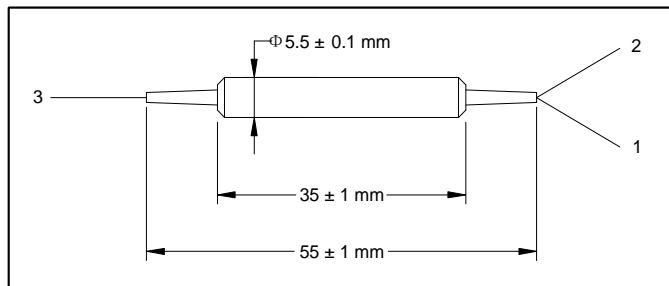

Ordering Information

PBC-①①-②-③-④-⑤-⑥-P

PBS-①①-②-③-④-⑤-⑥-P

①①: Wavelength

31 - 1310 nm

48 - 1480 nm

55 - 1550 nm

SS - Specify

③: Connector Type

1 - FC/UPC

2 - FC/APC

3 - SC/UPC

4 - SC/APC

N - None

④: Fiber Type

B - 250 μ m Panda fiber

L - 900 μ m loose tube

S - Specify

⑤: Fiber Type for Port 3

1 - SMF-28

2 - Slow axis aligned 45° to Port 1

3 - Slow axis aligned to Port 1

S - Specify

②: Grade

P - Premium

A - A grade

⑥: Fiber Length

Q - 0.75 m

S - Specify